




BRUSHLESS MOTOR



18V 3000mAh  
Li-Ion BATTERY

**400KGS**

**ZP96**

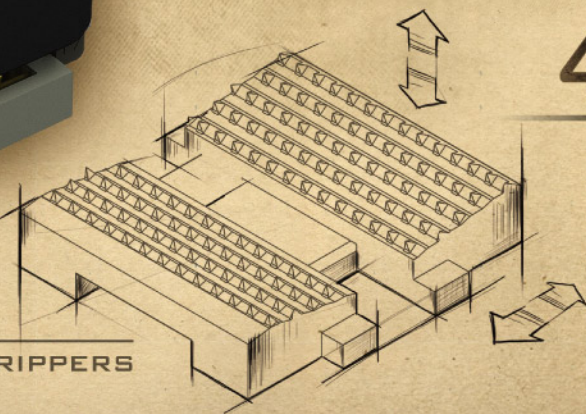

PATENTED STRAP GRIPPERS

**ZAPAK<sup>®</sup>**

**HIGH TENSION BATTERY POWERED PLASTIC STRAPPING TOOL  
ZP92 / ZP96**



## FEATURES

### Latest technology

- **Brushless motor-ZAPAK** patented single motor design provides extremely long service life.
- **Li-Ion battery**-18V 3000mAh high capacity rechargeable battery and **Bosch** 30 minutes charger.

### Powerful & Speedy

- Max. tension 420 kgs (4200N) - **ZP96A heavy duty** model.
- Max. tension 260 kgs (2600N) - **ZP92A standard duty** model.
- **Patented strap grippers design** contributes to high tension ability.
- **Single-handed operation** performs automatic tensioning, friction welding and cutting efficiently.

### Smart & Easy

- **Pre-programmed touch panel** with digital signal to suit different operation needs instinctively.
- **Lightest** model in same class of tools less than 3.5 kg (only 7.7 lbs incl. battery) relieves operation fatigue.
- Special tool retreating device ensures smooth and **easy removal of tool**.
- **Unique rear-end roller** design prevents scratches or worn out damages on strapping objects.
- **User self-adjustable strap widths guiders** and self-changeable wearing parts.
- **Optional hanger** reduces operation fatigue.
- **Soft mode** device facilitates lighter strapping tension force for light packages or fragile objects.

### Safety

- Single-handed operation **conforms to CE safety directive** and meets RoHS requirements.
- Li-Ion battery **complies with UN38.3** safety requirements.

## SPECIFICATION

Model No.	Fits Poly-Strap	Strap Width		Strap Thickness		Tension Range	Sealing Efficiency	Dimension	Tool Weight	Battery Weight
		mm	inch	mm	inch					
ZP92A	PP	9~16	3/8 }	0.55~1.35	0.022~0.053	10~260 kgs ( 22~572 lbs )	85 ± 5%	Approx. 33 x 15 x 12.5 cm ( 13 x 6 x 5 inch )	Approx. 3.46 kgs / 7.7 lbs with battery	Approx. 0.66 kgs / 1.45 lbs
	PET									
ZP96A	PP	16 & 19	5/8 & 3/4	0.75~1.35	0.029~0.053	40~420 kgs ( 88~924 lbs )	85 ± 5%	Approx. 33 x 15 x 12.5 cm ( 13 x 6 x 5 inch )	Approx. 3.46 kgs / 7.7 lbs with battery	Approx. 0.66 kgs / 1.45 lbs
	PET			0.65~1.35	0.026~0.053					

- Bosch charger A/C voltage 100V, 115V, 230V, 240V available for different markets demand.
- Sealing time adjustment: 0.4 ~ 2.0 seconds. ( 0.2 second / increment )
- Li-Ion battery life is up to 2000 charges with proper charging and discharging habits.
- A Fully charged Li-Ion battery supports approx. 650 cycles with regular specification & quality of PP straps.  
Cycle number varies based on strap quality, specifications, tension force and sealing time settings etc.

<Remarks>

- ◆ Tension performance and sealing efficiency varies based on battery capacity, strap specifications & quality.
- ◆ Please select cutter based on your strap type. Both PET cutter and PP cutter are available to suit your demand.

## DISTRIBUTOR



### GAMITA PAK-IT PTE. LTD.

164 Kallang Way #02-07  
Kolam Ayer Industrial Estate - Singapore 349248  
P: +65 6842 2686 / +65 6846 0737  
<http://www.gamitapakit.com.sg>



©2012 Pantech International Inc. All rights reserved.  
Worldwide Patented.  
Printed in Taiwan, R.O.C.  
ZAPAK is a registered trademark of Pantech International Inc.  
Product and specifications subject to change without notice.  
One Year limited manufacturer warranty.



P/N 92XX102A